


Pulls, push bars and plates
Push, pull and protection plates

8305

Pull plate

Specifications

Material substrate	Made from aluminum, brass or stainless steel (300 Series)
Mounting hardware	<ul style="list-style-type: none"> ▪ ¼"-20 mounting hardware ▪ Specify door thickness <ul style="list-style-type: none"> - Standard mounting hardware for door thickness of 1 ½" to 1 ¾" unless otherwise specified - Optional package available for 2" and 2 ¼" thick doors ▪ Comes standard with through bolt screws and decorative washers. ▪ Optional mounting hardware available (see general information section for details) ▪ Mounting hardware for other door thicknesses are available as engineering special, consult customer service. ▪ Standard mounting package for plate <ul style="list-style-type: none"> - #6 x 5/8 Oval head screws ▪ Optional Tek/Torx package <ul style="list-style-type: none"> - #6 x 5/8 Self-drilling, self-tapping screws - #6 x 5/8 Torx screws ▪ Plate prepped with 2 pull mounting holes spaced at 6", 8", or 10" center to center
Widths and heights	<ul style="list-style-type: none"> ▪ 3 ½" x 15" ▪ 4" x 16" ▪ 6" x 16"
Pull center to center spacing	<ul style="list-style-type: none"> ▪ 6" ▪ 8" ▪ 10"
Certifications	Meets ANSI/BHMA A156.06



Finishes

BHMA	Description	Substrate	Finish
605	Bright Brass	Brass	US3
606	Satin Brass	Brass	US4
612	Satin Bronze	Brass	US10
613	Oil Rubbed Bronze	Brass	US10B
619	Satin Nickel	Brass	US15
625	Bright Chrome	Brass	US26
626	Satin Chrome	Brass	US26D
626-AM	Satin Chrome Antimicrobial	Brass	US26D-AM
628	Clear Anodized	Aluminum	US28
630	Satin Stainless	Stainless steel	US32D
630-AM	Satin Stainless Antimicrobial	Stainless steel	US32D-AM
631	Matte Black	Stainless steel	BLK
643e/716	Aged Bronze	Stainless steel	643e/716
695	Dark Bronze Powder Coat	Stainless steel	SP313/US10BE

Note: For other colors, consult factory.

Additional information

- Plate to pull clearance is 1 ½"
- Custom widths, heights, and special cut-outs are available as engineering special, consult customer service

Introduction
Table of contents
Hinges and pivots
Pulls, push bars and plates
Flush bolts, strikes and coordinators
Latches, catches and bolts
Door stops, holders and silencers
Exterior hardware
Miscellaneous hardware

Pulls, push bars and plates


Architectural, decorative, long door pulls, push bars and plates

Mounting hardware

Mounting sizes


- All mounting hardware is for standard 1 3/4" door.
- Optional mounting hardware for 2" and 2 1/4" doors for many pulls. See pull detail for availability.
- Other mounting hardware sizes available as engineering special. Consult Customer Service.

Through bolt mounts

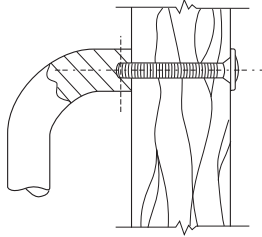


STD mount - Standard mount

- Through bolt mount with countersunk washers
- Hollow metal and wood door applications
- (2) 3/8-16 x 2 1/4" brass, flathead mounting screws, plated to match
- (2) 3/8-16 Countersunk washers, plated to match

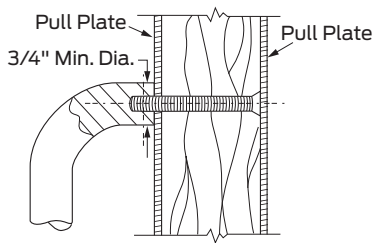


F mount - Countersunk holes

- Used with countersunk holes in doors
- Wood door applications
- (2) 2 1/4" steel flathead mounting screws, plated to match

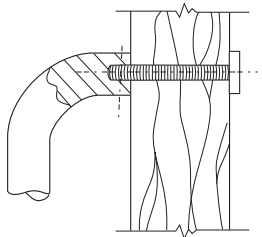


O mount - Decorative

- Decorative through bolt mount
- Hollow metal and wood door applications
- (2) 3/8-16 x 2 1/4" Decorative mounting bolts - machine screw, plated to match



Q mount - Decorative, glass doors

- Decorative through bolt mount
- Glass door applications
- (2) Decorative mounting bolts - machine screw, plated to match
- (2) Metal and vinyl washers

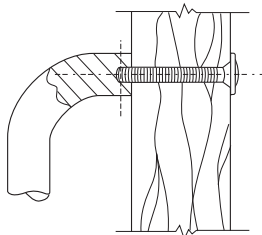

X mount - Security

- Security through bolt mount with countersunk washers
- Hollow metal and wood door applications
- (2) Flathead security pin in socket mounting screws, plated to match
- (2) Countersunk washers, plated to match