

Architectural Door Accessories

ASSA ABLOY

PemkoHinge® Continuous Geared Hinges: Full-Mortise Safety Hinges: Short Leaf Inset

The global leader in
door opening solutions

_FM_SLISF



AVAILABLE FINISHES: **BL, C, D, PW, SN**

WIDTH: 13/16" (20.6 mm)
(between frame edge and door edge,
square edge door applications)

WIDTH: 27/32" (21.4 mm)
(between frame edge and door edge,
beveled edge door applications)


CAP WIDTH: 25/32" (19.8 mm)

HEIGHT: 2-3/8" (60.3 mm)
(to top cap/frame edge & door edge sides)

HEIGHT: 1-1/2" (38.1 mm)
(frame edge side - leaf)

HEIGHT: 1-19/32" (40.5 mm)
(to flange/door edge side - leaf)

BL (Black Anodized) - special request only
C (Clear Anodized)
D (Dark Bronze Anodized)
PW (Painted White) - special request only
SN (Satin Nickel Anodized)

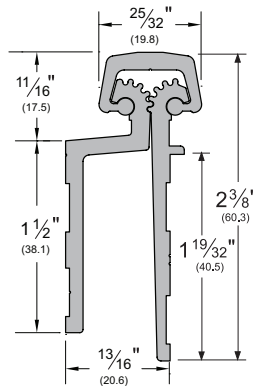

TITLE:
PREPARED FOR:
PREPARED BY:
DATE:
COMMENTS: