
The 4630 AUTO EOUALIZER™ is LCN's SMART & RELIABLE electrically powered low-energy power operator. It provides easy access for people with disabilities, or the elderly. Designed primarily for manual opening applications that occasionally required automatic opening.


- Digital Control Box.
- Utilizes a 4040 Heavy Duty Door Closer.
- On-Board Diagnostics.
- On-Board Power Supply.
- Factory-Default Memory.
- Includes "No Destruct" Drive System.
- Guard Rails or Safety Mats not required.

4630 Series is UL and cUL listed with standard arm for self-closing doors and meets the provisions of ANSI Standards A117.1, A156.19, and the Americans with Disabilities Act.

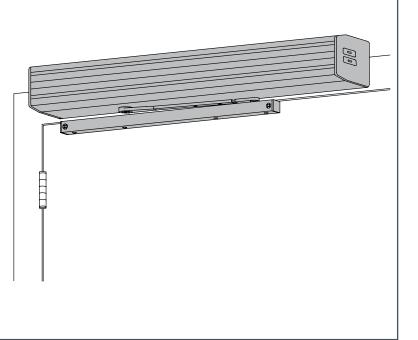

TOP JAMB (PULL SIDE) MOUNTING

- Standard, top jamb (pull side) mounted 4630 Series closer shipped with single lever (standard) arm, metal cover, standard track, and wood and machine screw pack. Actuators available separately, see pages 122-137.
- Meets ADA requirements (power mode).
- Non-sized cylinders for interior doors to 4 ′0″ and exterior doors to 3 ′0″.
- Non-handed for either right or left swinging door.
- 4630 has easily accessible switches to provide on/off and continuous hold open functions. 4630 with CS option provides concealed on/off power switch. Control module provides all timing and sequential door functions, electric strike controls and adjustments for opening speed and force.
- Standard or optional custom powder coated finish, end caps are black.
- Optional plated finish on cover, arm, and fasteners.

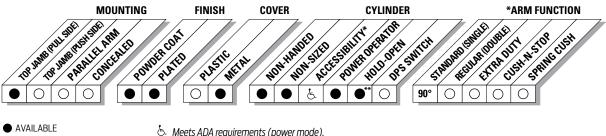

- **O** NOT AVAILABLE
- See individual series for maximum manual opening.
- ** Switch provided for continuous hold open (4630 only).






TOP JAMB (PULL SIDE) MOUNTING

MAXIMUM OPENING

Templating allows 90° power opening and 170° manual opening.

Please note that many track style door closers are capable of allowing 180° of door swing. Track style closers are at their weakest closing force at 180°. Consult factory for applications where exterior or large/heavy door must swing 180°.

Consult factory for all pivot mounted installations.

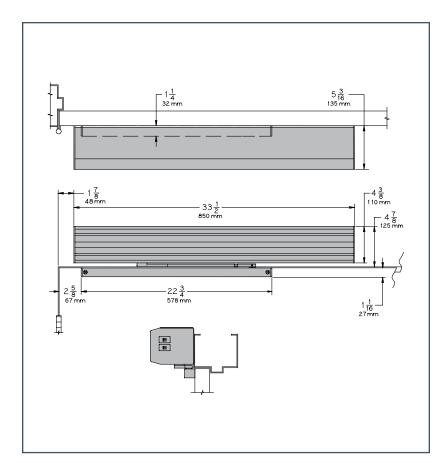

- Butt Hinges should not exceed 5" (127 mm) in width.
- Auxiliary Stop is recommended.
- **Reveal** should not exceed 1/8" (3 mm).
- Head Frame minimum 2["] (51 mm).
- **Top Rail** minimum 1-1/8″ (29 mm).
- Opening Time and Force are variable by adjustments to the electronic control module located on the operator assembly. Maximum hold open time adjustable up to approximately five minutes.
- **System Diagram** See "AUTOMATIC OPERATORS" section pages 36 for typical system wiring and pages 37-38 for electrical data.

Special Templates

Customized installation templates or products may be available to solve unusual applications. Contact LCN Product Support for assistance.





CYLINDERS

CYLINDER ONLY, 4631-3971


Standard, non-handed, cast iron cylinder.

CYLINDER ASSEMBLY, 4631-3071


Standard, non-handed, cast iron cylinder and mounting plate. Includes; 4630-3454 Motor Clutch, 4630-3180 I/O Board Assembly and 4630-3462 Controller.

CYLINDER ASSEMBLY, 4631-3071CS


Standard, non-handed, cast iron cylinder and mounting plate. Includes; 4630-3454 Motor Clutch, 4630-3180 I/O Board Assembly and 4630-3462 Controller. Same as a 4630-3071 assembly except on/ off switch is concealed in endcap and no hold open switch is included. (Separate key switches suggested).



CESS



COVERS COVER, 4630-72MC Standard, non-handed metal cover.





Standard non-handed track. Will not accept hold open clip or bumper assembly.


ARMS STANDARD ARM, 4630-3077T Non-handed arm. Track roller not included with arm.


INSTALLATION ACCESSORIES

TRACK ROLLER, 4630-3034 Quiet low friction roller assembly. Shoulder dimension "X" = 1/8" (3mm).

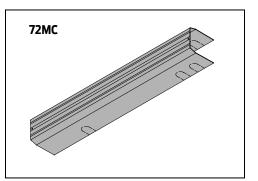

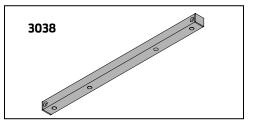







LCN®



INSTALLATION ACCESSORIES

SWITCH END CAP, 4630-334

End cap (black powder coat finish only) with cut outs for installing on/ off and hold open switches.

BLANK END CAP, 4630-334-2

Black powder coat only.

SWITCH END CAP, 4630-334CS

End cap and switch (black powder coat only) for concealed switch option.

ON/OFF SWITCH ASSEMBLY, 4630-3179-1

Black rocker switch. Plugs into high voltage PC board.

HOLD OPEN SWITCH ASSEMBLY, 4630-3179-2


Black rocker switch. Field wired to low voltage PC board.


PC BOARD ASSEMBLY, 4630-3180


High and low voltage PC boards connected to mounting bracket.


MOTOR/CLUTCH ASSEMBLY, 4630-3454

A geared assembly in an LCN power operator that incorporates a "no destruct" feature.

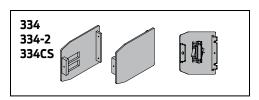

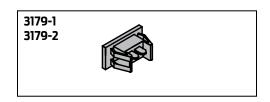

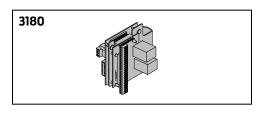

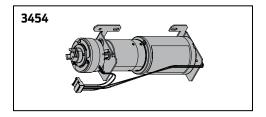

CONTROL BOX ASSEMBLY, 4630-3462


Digital controller with built-in 12/24 VDC power supply. Programming and timing functions are adjusted on controller.


AC POWER CABLE, 4630-3498-2

2 wire cable to connect 120 VAC from PC board assembly to controller.

RIBBON CABLE CONNECTOR, 4630-3498-1

16 wire ribbon cable connecting 1-24 pin terminal connectors to controller.

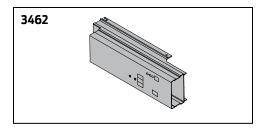

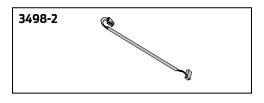








TABLE OF SIZES

Non-Sized 4630 series cylinder is adjustable from size 1 through size 4 and is shipped set to size 3. Closing power of 4630 Series closers may be increased 50%.

EXTERIOR (and VESTIBULE) DOOR WIDTH



INTERIOR DOOR WIDTH



->> Indicates recommended range of door width for closer size.

NOTE: Minimum door width 36" (914 mm).

4630 SERIES

HOW-TO-ORDER 4630 SERIES CLOSERS 1. SPECIFY FINISH

□ Standard Powder Coat _____ Aluminum, Dark Bronze, Statuary, Light Bronze, Black, Brass.

Closer will be shipped with:

- STANDARD CYLINDER,
- STANDARD METAL COVER,
- STANDARD ARM,
- TRACK ROLLER,
- STANDARD TRACK,
- WOOD and MACHINE SCREW PACK, unless options listed below are selected.

CLOSER OPTIONS

CYLINDER ASSEMBLY

□CS (concealed on/off switch) (separate key switches suggested)

FINISH

□ Custom Powder Coat (RAL) _____ □ Plated Finish, US _____

SCREW PACK

- □ TB*, Wood & Machine Screw (TBWMS)
- □ TORX Machine Screw (TORX)
- □ TB* & TORX Machine Screw (TBTRX)
- *Specify door thickness if other than 1-3/4".

SPECIAL TEMPLATE

□ ST-____