


## Pulls, push bars and plates

### Push, pull and protection plates

# 8400/8402

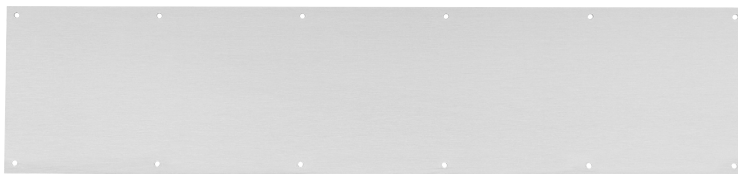

### Commercial protection plates (UL and non-UL models)

- All plates, metal and plastic, come standard with four beveled edges and countersunk mounting holes (B-CS)
- Protection plates must be ordered in 1/2" increments. Available in other sizes, consult customer service
- For 8402 UL Plates, UL mark appears in upper left corner. Not available on plastic protection plates (special cutouts are not allowed on UL kick plates)

### Specifications

Material substrate	<ul style="list-style-type: none"> <li>▪ Available in .050" thick brass, stainless steel or aluminum; and 1/8" thick high impact polyethylene in clear or black</li> <li>▪ Aluminum 5005 Series, brass C26800 Series, stainless steel 300 Series, plastic</li> </ul>
Mounting hardware	<ul style="list-style-type: none"> <li>▪ Standard mounting package, 16 per pack           <ul style="list-style-type: none"> <li>– #6 x 5/8" Oval head screws</li> </ul> </li> <li>▪ Optional Tek/Torx package, specify TK-TX           <ul style="list-style-type: none"> <li>– #6 x 5/8" Self-drilling, self-tapping screws</li> <li>– #6 x 5/8" Torx screws</li> </ul> </li> </ul>
Certifications	<ul style="list-style-type: none"> <li>▪ Meets ANSI/BHMA A156.6 for J301</li> <li>▪ UL protection plates certified to UL10C</li> </ul>

### Number of screw packs required by plate size (specify Tek screws or Torx screws)

	22"-25"	26"-33"	34"-41"	42"-48"
4"-8"	1	1	1	1
9"-16"	1	1	1	1
17"-24"	1	1	1	2
25"-32"	1	1	2	2
33"-40"	1	2	2	2
41"-48"	2	2	2	2

### Options

- Specify B-NH for no mounting holes (Not available on 8402. Available only with US32D, US32, US3, US4, US28, CLR, P-BLK only)
- Specify B-NHA for no mounting holes with adhesive (Not available on 8402.)
- Specify ERS prepped with extra row of screws
- Special Cut-outs are available as engineering special, consult customer service

### Finishes

BHMA	Description	Substrate	Finish	Max sizes
605	Bright Brass	Brass	US3	24" x 48"
606	Satin Brass	Brass	US4	24" x 48"
612	Satin Bronze	Brass	US10	24" x 48"
613	Oil Rubbed Bronze	Brass	US10B	36" X 46"
619	Satin Nickel	Stainless	US15	24" x 48"
625	Bright Chrome	Stainless	US26	48" X 48"
626	Satin Chrome	Brass	US26D	30" x 36"
628	Satin Aluminum	Aluminum	US28	48" x 48"
629	Bright Stainless Steel	Stainless steel	US32	48" x 48"
630	Satin Stainless Steel	Stainless steel	US32D	48" x 48"
654	Satin Stainless Steel	Stainless steel	US32D	48" x 48"
695	Dark Bronze Powder Coat	Stainless steel	SP313/US10BE	24" x 48"
BLK	Matte Black	Stainless steel	BLK	24" x 48"
P-BLK	Black	Plastic	P-BLK	48" x 48"
CLR	Clear	Plastic	CLR	48" x 48"

Custom finishes are available as engineering special, consult customer service

### Available accessories

- Gasket tape kit tape is recommended when using a brass plate on a metal door to reduce tarnishing from electrolytic oxidation
- One tape pack will cover an the perimeters of a 8" x 34" kickplate (Order 8401 gasket tape)